

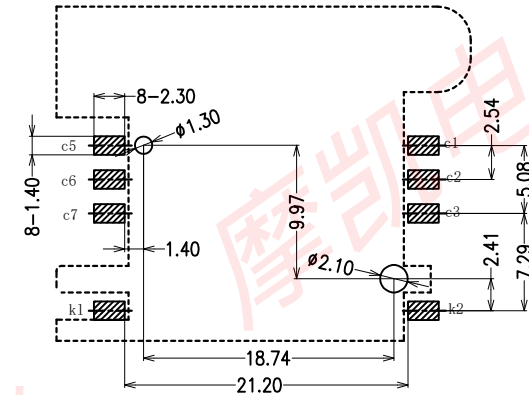

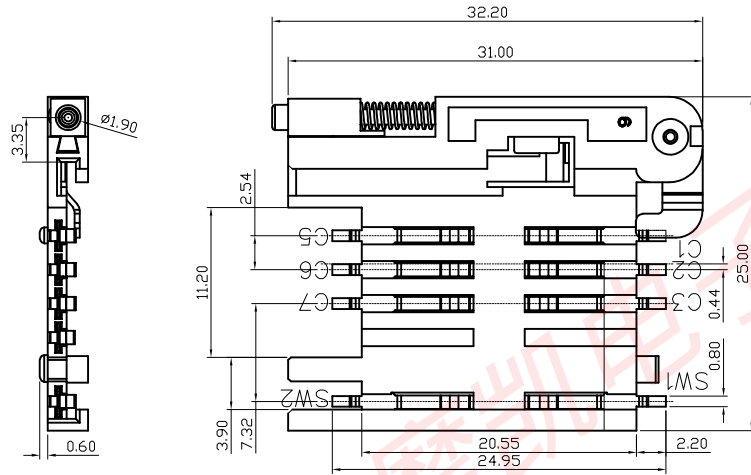


* 所有原料材质, 生产制程, 电镀必须符合ROHS 2.0要求

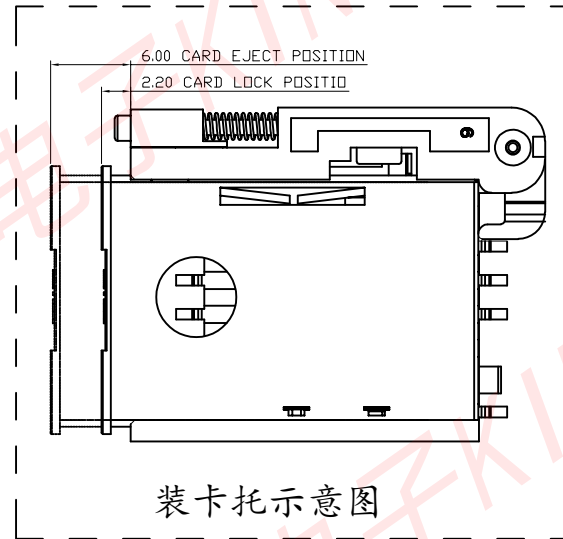

PCB AREA
RECOMMENDED PCB LAYOUT
GENERAL TOLERANCE ±0.05

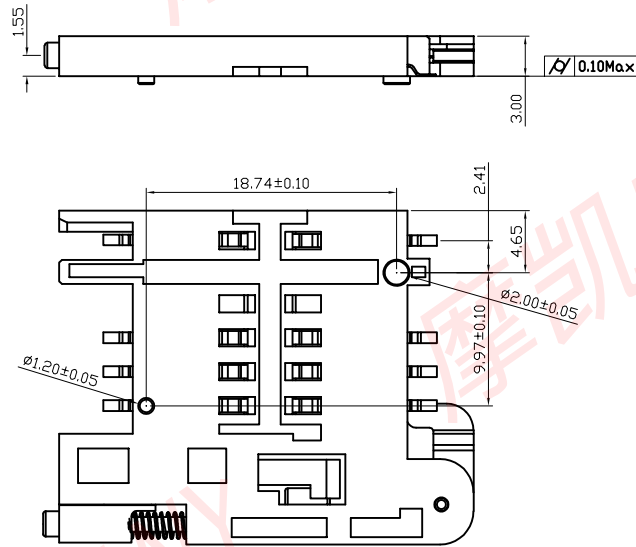

Specification

MATERIAL:

Insulator: High Temperature Thermoplastic,
(塑胶: 黑色LCP, 防火等级UL 94V-0)
帽子: PA6T UL 94V-0
Contact: Copper Alloy (铜) T=0.15mm


PLATING:

Contact: Plated 50u'' Ni Overall Contact Au G/F, pad TIN
(端子: 镍底50u, 接触点G/F, 焊点锡50u最少)

Electrical:

Current Rating :2Amps.max (额定电流:2A最大)
Voltage Rating :5V AC/DC (额定电压:5V AC/DC)
Ambient Temperature Range :-40° C~+85° C (工作温度: -40度到+85度)
Storage Temperature Range :-40° C~+85° C (工作环境: -40度到+85度)
Ambient Humidity Range :95% R.H. Max. (上锡效果: 95%以上)
Contact Resistance:100mΩmax. (端子接触电阻: 100m 最大)
Insulation Resistance:1000MΩmin./500VDC (绝缘阻抗: 1000兆欧最小)
产品耐温度: 260度
Mating Cycles:5000Min Insertions (寿命: 5000次)

PIN NO.	PIN NAME
	Supply Voltage Vcc
C2	Reset (RST)
C3	Clock (CLK)
C4	N/A
C5	Ground
C6	Programming Voltage Vpp
C7	I/O
C8	N/A



X0	---	NEW RELEASE	Aaron	2022.10.19
REVISION NO.	ECR NO.	DESCRIPTION	MARK	DATE
1				
2				
3				

KINY

东莞市摩凯电子有限公司

DIMENSIONS INIT: mm
UNLESS OTHERWISE SPECIFIABLE

DIMENSION	TOLERANCE
X.X: ±	0.35
X.XX: ±	0.20
X.XXX: ±	0.10
ANGULAR: ±	2'

PRODUCT NAME : SIM CARD 抽屉式(6P 不带卡托)	DRAWING: Aaron	DATE: 2022.10.19
PRODUCT NO. : KF016-L0012-32	CHECK:	DATE:
DRAWING NO. : D-KF016-L0012-32	APPROVED:	DATE:
SCALE: 1:1	DWG ID: C D	REV.: X0
		PAGE: 1 of 1