
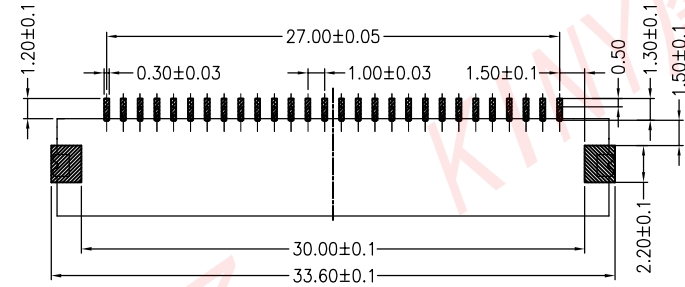
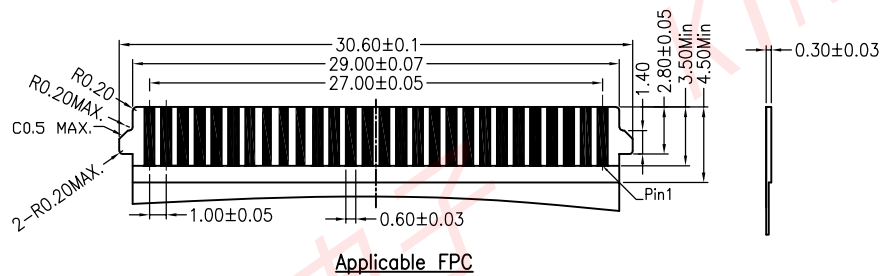
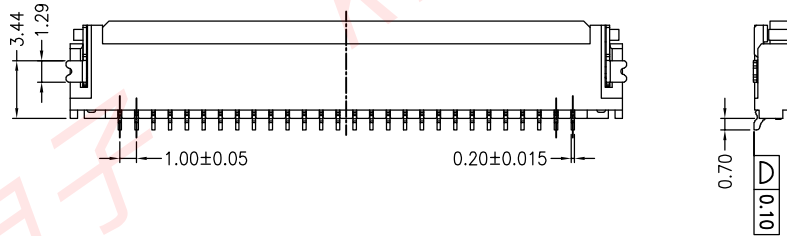


* 所有原料材质, 生产制程, 电镀必须符合IPC要求

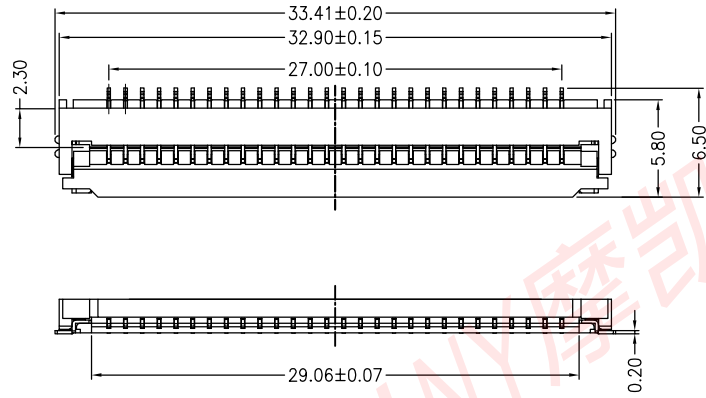

NOTES: RECOMMEND PCB LAYOUT

- Tolerance: ± 0.05
- MATERIAL:
 - HOUSING: THERMOPLASTIC, HIGH TEMP, UL94V-0. COLOR IS NATURAL
 - ACTUATOR: THERMOPLASTIC, HIGH TEMP, UL94V-0. COLOR SI BLACK.
 - CONTACT: COPPER ALLOY.
 - FITTING NAIL: COPPER ALLOY.
 - PLATING:
 - TERMINAL PLATING:
 - THE NICKEL BASE 50 μ MIN
 - A0: GOLD FLASH OVERALL.
 - A3: 3 μ GOLD ON CONTACT AND SOLDER FOR IS GOLD FLASH OVERALL.
 - MS: 100 μ MIN. MATT TIN UNDERPLATING OVERALL.
 - FITTING NAIL:
 - 50 μ MIN. NICKEL UNDERPLATING OVERALL.
 - 80 μ MIN. MATT TIN UNDERPLATING OVERALL.
 - THE COPLANARITY IS 0.10mm MAX.
 - THE TRUE POSITION IS 0.10mm MAX.
 - REFLOW SOLDER CAPABLE TO 260°C.
 - PART NUMBER

FPC1020-F028XX-02

- 10: MATT TIN
- 11: GOLD FLASH ON CONTACT
- 21: 3 μ GOLD ON CONTACT

KINY

东莞市摩凯电子有限公司

DIMENSIONS INIT: mm UNLESS OTHERWISE SPECIFIABLE DIMENSION TOLERANCE X.X: \pm 0.35 X.XX: \pm 0.20 X.XXX: \pm 0.10 ANGULAR: \pm 2'	PRODUCT NAME : FPC 1.0mm PITCH H=2.0 前掀盖/带LOCK	DRAWING: FAJI	DATE: 2021.06.05	
	PRODUCT NO. : FPC1020-F028XX-02	CHECK: Alex	DATE: 2021.06.05	
	DRAWING NO. : D-FPC1020-F028XX-02	APPROVED: Alex	DATE: 2021.06.05	
		SCALE: 1:1	DWG ID: C D	REV.: A

A	----	NEW RELEASE	FAJI	2021.06.05
REVISION NO.	ECR NO.	DESCRIPTION	MARK	DATE
1		2	3	4