

* 所有原材料, 生产制程, 电镀必须符合H要求

ELECTRICAL CHARACTERISTICS

30V DC/AC 1A MAX.


CONTACT RESISTANCE: $30\text{ m}\Omega$ MAX INSULATION

RESISTANCE: $100\text{ M}\Omega$ MIN, AT 500V DC.

30V DC/AC 1A MAX.

DIELECTRIC STRENGTH 100V AC/1 MINUTE.

INSERTION FORCE: 35N MAX WITHDRAWAL: 10N MIN



原材料 Material:

1. 塑胶 Housing:

High Temperature Thermoplastics,

2. 端子 Contact: Copper Alloy C2680 厚度 0.25

3. 外壳 Shell: Copper Alloy C2680/SPCC 厚度 0.3

电镀 Finish:







1. 端子 Contact: Plated Gold in Mating Area;
Tin On Solder Tails

端子四周镀 $50\text{U}''$ (MIN) 锡, 镀金区域镀 $100-200\text{U}''$ 镀金 $1\text{U}''$

2. 外壳 Shell:

铜壳四周镀 $80\text{U}''$ (MIN) 锡

Nickel Plating

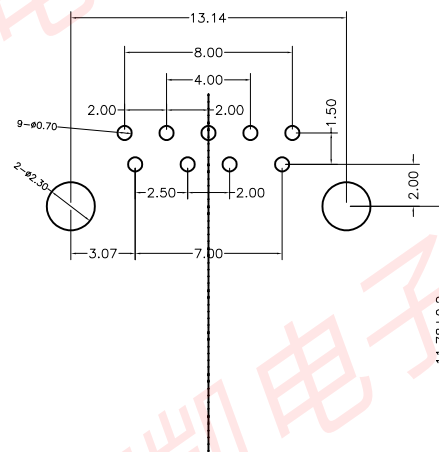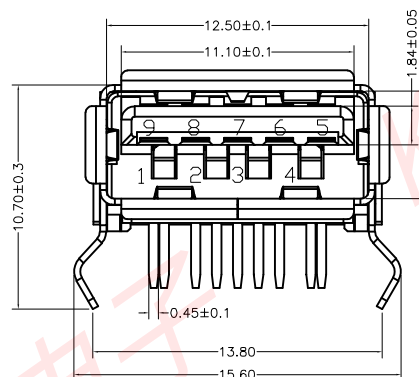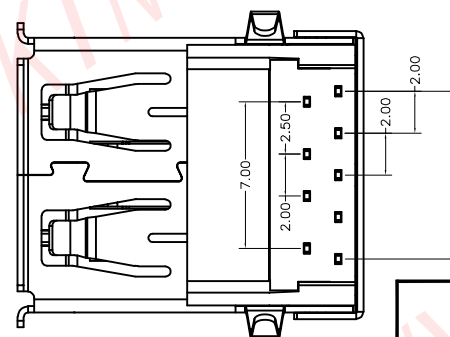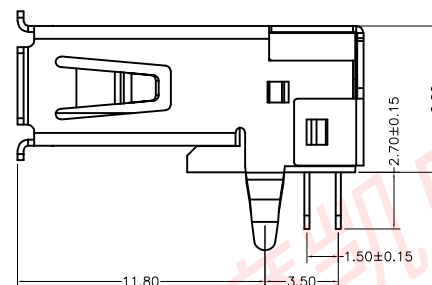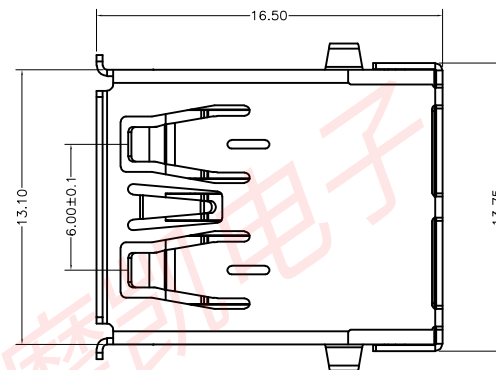

PCB LAYOUT

CONNECTOR
FRONT EDGE

A	---	NEW RELEASE	FAJI	2016.10.20
REVISION NO.	ECR NO.	DESCRIPTION	MARK	DATE

KINY		东莞市摩凯电子有限公司			
DIMENSIONS IN: mm		PRODUCT NAME :	USB 3.0 AF 90 青蛙脚	DRAWING:	FAJI
UNLESS OTHERWISE SPECIFIABLE		PRODUCT NO. :	USB09-D128M-01	CHECK:	Alex
DIMENSION TOLERANCE		DRAWING NO. :	D-USB09-D128M-01	APPROVED:	Alex
X.X: ±	0.35			SCALE:	1:1
X.XX: ±	0.20			DWG ID:	C D
X.XXX: ±	0.10			REV.:	A
ANGULAR: ±	2'			PAGE:	1 OF 1