

* 所有原料材质, 生产制程, 电镀必须符合H要求

规格说明: Specifications:

电气特性: Electrical:

1. 额定电流: Current Rating
1.5A/contact terminal
2. 额定电压: Voltage Rating
30V DC
3. 接触阻抗: Contact Resistance
30 milliohms MAX
4. 耐电压: Dielectric Withstanding Voltage:
500 V AC AT Sea Level
5. 绝缘阻抗: Insulation Resistance:
1000MEGA ohms MIN

物理性能: Mechanical:

1. 插拔力: Connector Mate and Unmate Force
Mate force: 3.57kgf(MAX)
Unmate force: 1.02kgf(MIN)

原材料: Material:

1. 塑胶: Housing:
Hing Temperature Thermoplastics,

2. 端子: Contact: Copper Alloy C2680

3. 外壳: Shell: Copper Alloy C2680/SPCC

电镀: Finish:

1. 端子: Contact: Plated Gold in Mating Area;
Tin On Solder Talls






端子四周镀50U”(MIN)锡, 镀金区域镀100-200U”镀金1U”

2. 外壳: Shell:

铜壳四周镀80U”(MIN)锡

Nickel Plating

Nickel Plating

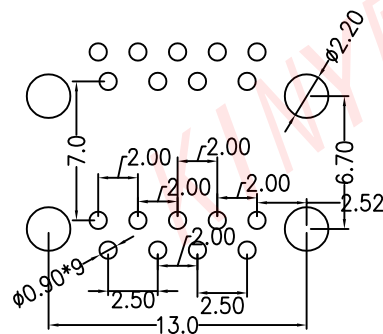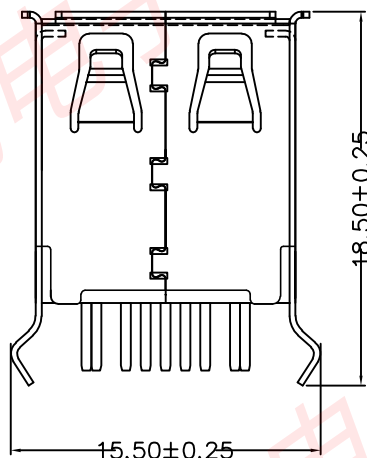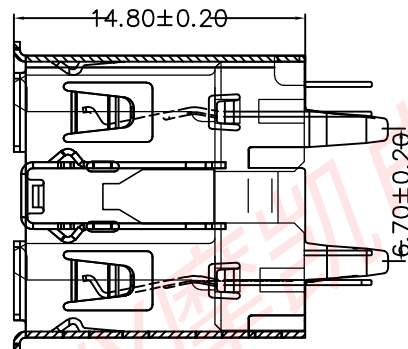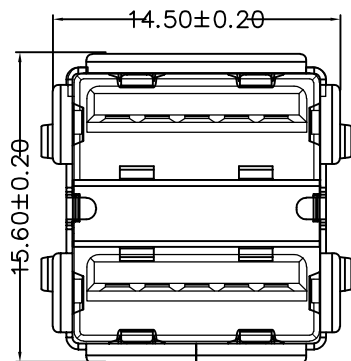

A	----	NEW RELEASE	FAJI	2016.10.20
REVISION NO.	ECR NO.	DESCRIPTION	MARK	DATE

KINY		东莞市摩凯电子有限公司			
DIMENSIONS INIT: mm		PRODUCT NAME : USB 3.0 双层180度卷边弯模有舌	DRAWING: FAJI	DATE: 2016.10.20	
UNLESS OTHERWISE SPECIFIABLE		PRODUCT NO. : USB18-D128M-01	CHECK: Alex	DATE: 2016.10.20	
DIMENSION TOLERANCE		DRAWING NO. : D-USB18-D128M-01	APPROVED: Alex	DATE: 2016.10.20	
X.X: ± 0.35			SCALE: 1:1	DWG ID: C D	REV.: A
X.XX: ± 0.20					PAGE: 1 OF 1
X.XXX: ± 0.10					
ANGULAR: ± 2°					