

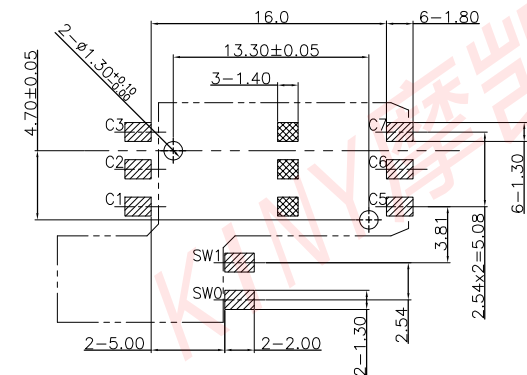
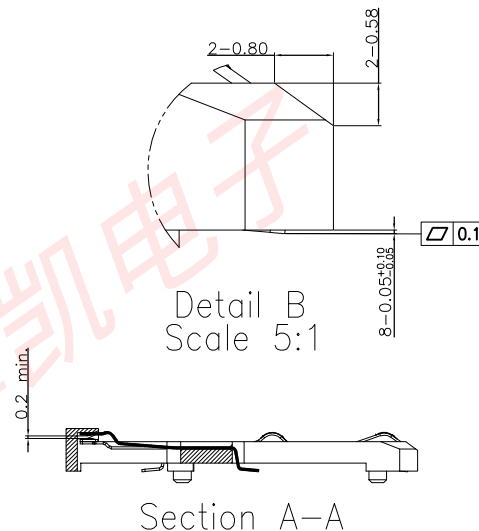
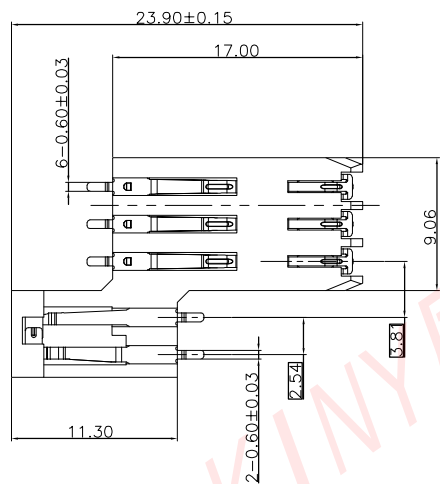


\* 所有原料材质, 生产制程, 电镀必须符合HTR要求



BOARD PAD NO WIRING AREA




Recommended PCB Layout  
Gengeral Tolerance :  $\pm 0.10\text{mm}$

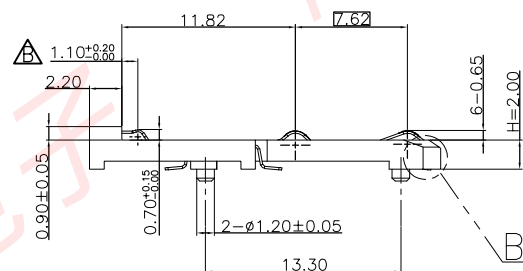

NOTE :

- Material:
  - Housing: High Temperature Thermoplastic, LCP, Color: Black, UL94V-0
  - Terminal and Switch: Phosphor Bronze,  $T=0.15\text{mm}$
- Plating:

Contact Area: Gold  $1\mu$ "  
Solder Area: Matte Tin  $100\mu$ " min.  
Underplating: Ni overall  $80\mu$ " min.
- Specification:
  - Contact Current Rating: 0.5A
  - Dielectric Withstanding Voltage: AC500V r.m.s.
  - Insulation Resistance: 1000 M $\Omega$  Minimum, at DC 500V.
  - Contact Resistance: 100 m $\Omega$  Maximum.
  - Mating Cycle: 100,000 Insertions.

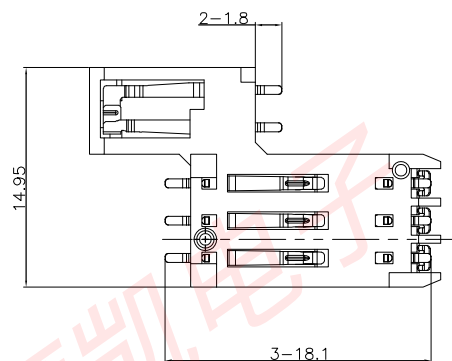

KINY

东莞市摩凯电子有限公司

DIMENSIONS INIT: mm  
UNLESS OTHERWISE SPECIFIABLE  
DIMENSION TOLERANCE  
X.X:  $\pm 0.35$   
X.XX:  $\pm 0.20$   
X.XXX:  $\pm 0.10$   
ANGULAR:  $\pm 2^\circ$

PRODUCT NAME :  
Smart卡座H=2.00mm

DRAWING: Jack

DATE: 2019.04.25

PRODUCT NO. :  
SM200-T1200-01


CHECK: Alex

DATE: 2019.04.25

DRAWING NO. :  
D-SM200-T1200-01

APPROVED: Alex

DATE: 2019.04.25



SCALE: 1:1

DWG ID: C D

REV.: A

PAGE: 1 OF 1

|              |         |             |      |            |
|--------------|---------|-------------|------|------------|
| A            | ----    | NEW RELEASE | Jack | 2019.04.25 |
| REVISION NO. | ECR NO. | DESCRIPTION | MARK | DATE       |