

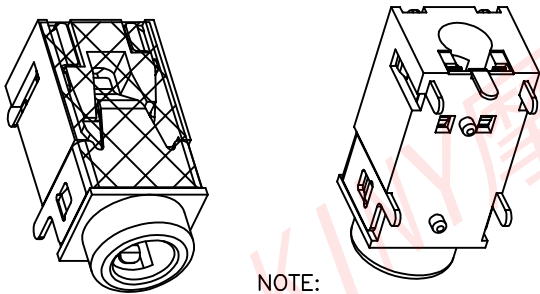
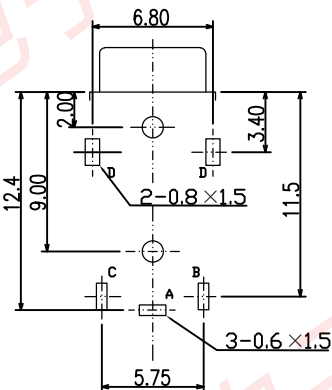
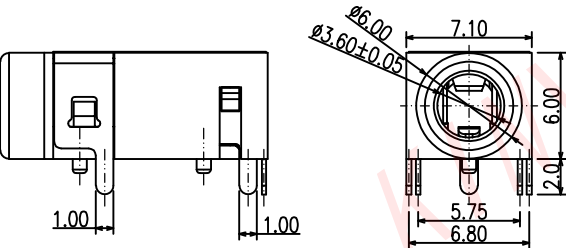


* 所有原材料, 生产制程, 电镀必须符合H要求



- NOTE:
- 1.ELECTRICAL CHARACTERISTICS:
 - 1.1 RATINGS:DC 30V 0.5A
 - 1.2 CONTACT RESISTANCE:50mΩ MAX
 - 1.3 INSULATION RESISTANCE:100MΩ MIN
 - 1.4 WITHSTAND VOLTAGE:AC 500V /1 Minute
 - 1.5 WORKING TEMPERATURE:-25~+85°C
 - 1.6 SOLDER HEAT RESISTANCE:260±5°C
 - 2.MECHANICAL CHARACTERISTICS:
 - 2.1 OPERATIONG FORCE:3~30N
 - 2.2 SERVICE LIFE:5,000 Cycle.

6	MEMBRANE	1	PI	YELLOW
5	TERMINAL#D	1	BRASS	PLATING AG 5U"MIN
4	TERMINAL#C	1	PHOSPHOR(CU)	PLATING AG 5U"MIN
3	TERMINAL#B	1	PHOSPHOR(CU)	PLATING AG 5U"MIN
2	TERMINAL#A	1	PHOSPHOR(CU)	PLATING AG 5U"MIN
1	HOUSING	1	PPA	YELLOW(136C)
NO.	DESCRIPTION	QTY	MATERIAL	PLATING

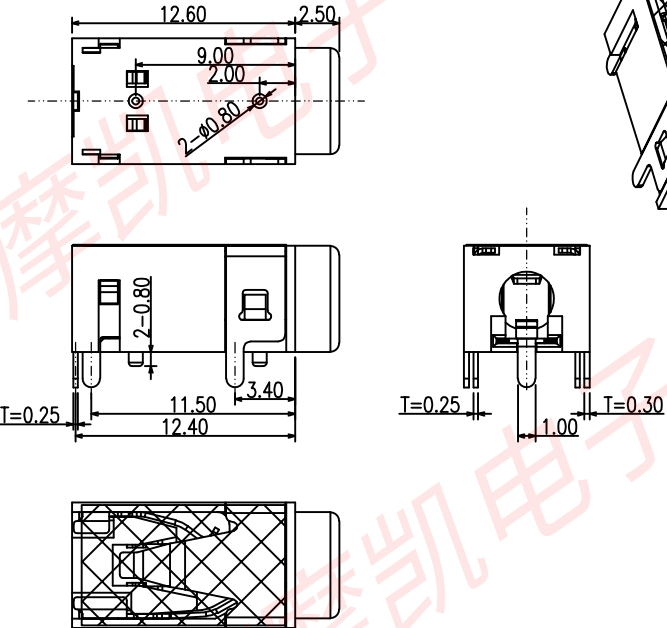

P.C.B.Land Pattern
Vertical view

A	----	NEW RELEASE	Alexander	2019.03.07
REVISION NO.	ECR NO.	DESCRIPTION	MARK	DATE

KINY		东莞市摩凯电子有限公司			
DIMENSIONS INIT: mm UNLESS OTHERWISE SPECIFIABLE DIMENSION TOLERANCE X.X: ± 0.35 X.XX: ± 0.20 X.XXX: ± 0.10 ANGULAR: ± 2'		PRODUCT NAME : PHONE JACK	DRAWING: Alexander	DATE: 2019.03.07	
		PRODUCT NO. : PJK600-D3000-01	CHECK: Mark	DATE: 2019.03.07	
		DRAWING NO. : D-PJK600-D3000-01	APPROVED: Mark	DATE: 2019.03.07	
				SCALE: 1:1	DWG ID: C D REV.: A PAGE: 1 OF 1