




* 所有原料材质, 生产制程, 电镀必须符合H要求

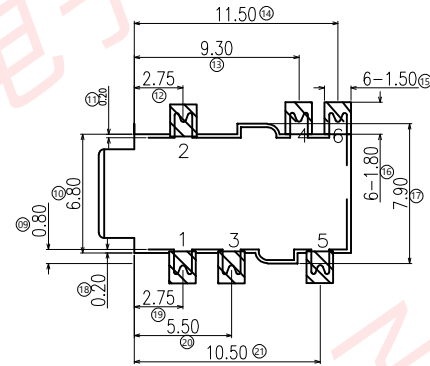


3D VIEW

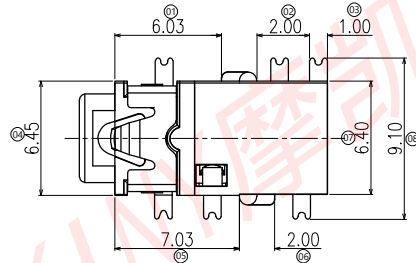

正贴

P.C.B LAYOUT TOP VIEW

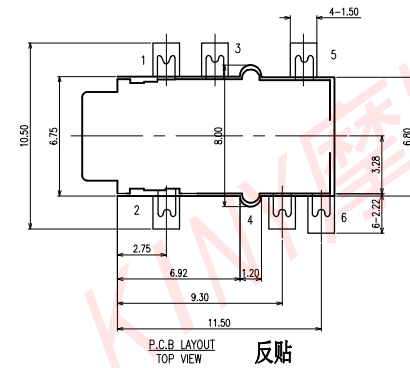

P.C.B LAYOUT TOP VIEW

反贴

NOTE:

1.ELECTRICAL CHARACTERISTICS:

1.1 RATINGS:DC 30V 1.0A

1.2 CONTACT RESISTANCE:100mΩ MAX

1.3 INSULATION RESISTANCE:100MΩ MIN

1.4 WITHSTAND VOLTAGE:AC 500V /1 Minute





1.5 WORKING TEMPERATURE:-25~+85°C

1.6 SOLDER HEAT RESISTANCE:260±5°C



2.MECHANICAL CHARACTERISTICS:

2.1 OPERATING FORCE:3~30N

2.2 SERVICE LIFE:5,000 Cycle.

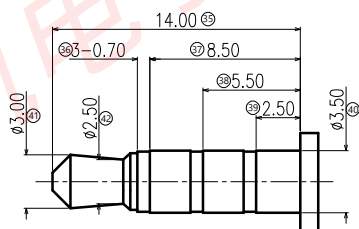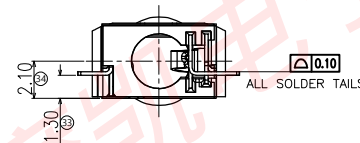

(ø3.50mm 4 POLE PLUG DETAIL DRAWING)



SCHEMATIC

NO.	DESCRIPTION	QTY	MATERIAL	PLATING
4	TERMINAL4	1	C5210	PLATING AU 1U"
3	TERMINAL2	1	C5191	PLATING AU 1U"
2	TERMINAL1/3/5/6	N	SUS304	PLATING AU 1U"
1	HOUSING	1	NORMAL TEMPERATURE PLASTIC	

KINY

东莞市摩凯电子有限公司

DIMENSIONS INIT: mm
UNLESS OTHERWISE SPECIFIABLE
DIMENSION TOLERANCE
X.X: ± 0.35
X.XX: ± 0.20
X.XXX: ± 0.10
ANGULAR: ± 2'

PRODUCT NAME : PHONE JACK	DRAWING: Alexander	DATE: 2019.03.07
PRODUCT NO. : PJK130-T1100-01	CHECK: Mark	DATE: 2019.03.07
DRAWING NO. : D-PJK130-T1100-01	APPROVED: Mark	DATE: 2019.03.07
SCALE: 1:1	DWG ID: C D	REV.: A
		PAGE: 1 OF 1

A	---	NEW RELEASE	Alexander	2019.03.07
REVISION NO.	ECR NO.	DESCRIPTION	MARK	DATE
1				