


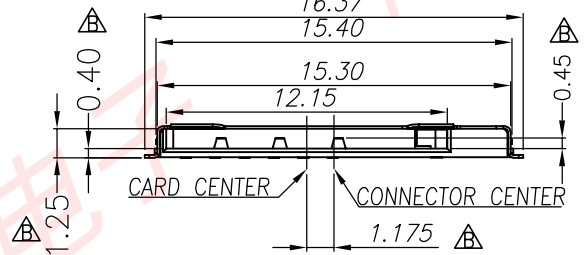
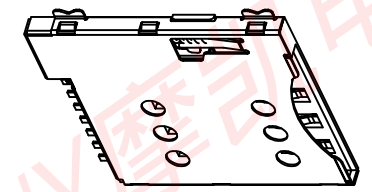


\* 所有原料材质, 生产制程, 电镀必须符合IP要求

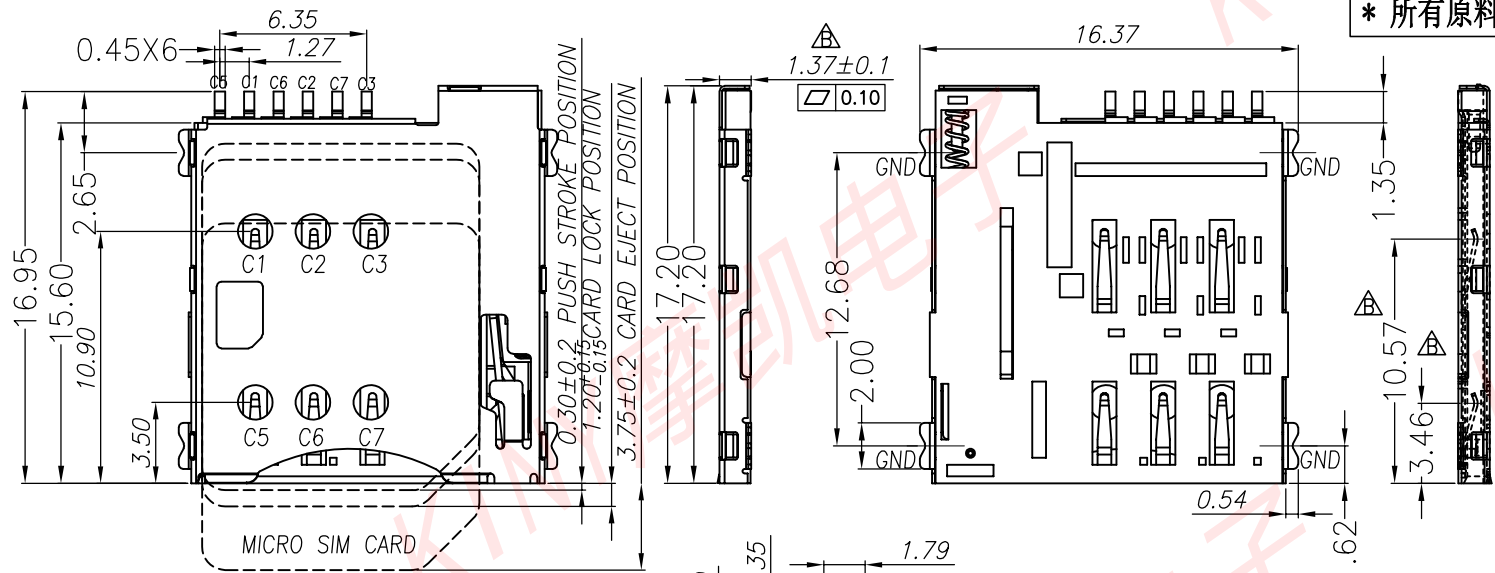

C1:VCC  
C2:RST  
C3:CLK  
C4:RESERVED  
C5:GND  
C6:VPP  
C7:I/O  
C8:RESERVED

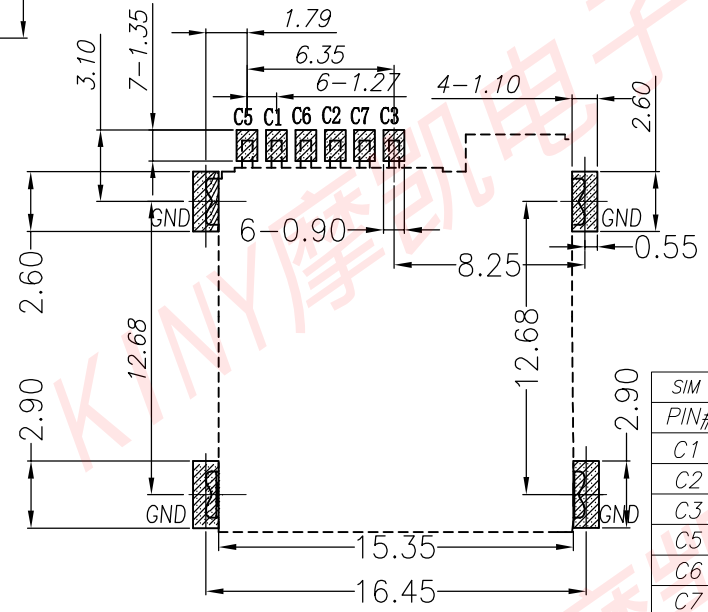

SIM pin assignment	
PIN#	Name
C1	VCC 供电电压
C2	RST 重置
C3	CLK 时钟
C5	GND 接地
C6	VPP 程序电压
C7	I/O 输入输出

PCB 焊盘区  
下沉避让区

RECOMMENDED PCB LAYOUT  
GENERAL TOLERANCE ±0.05

### Specification

#### MATERIAL:

Insulator: High Temperature Thermoplastic, UL 94V-0.  
Contact: Copper Alloy  
SHELL: SUS

#### PLATING:

Contact: Plated 50u'' Ni Over all Contact Au 1U  
Shell: Plated 50u'' Ni Overall  
Plated 1u''Au Selective Contact Area

#### Electrical:

Current Rating :0.5mA  
Voltage Rating :5V AC/DC  
Ambient Temperature Range :-20° C~+60° C  
Storage Temperature Range :-40° C~+85° C  
Ambient Humidity Range :95% R.H. Max.  
Contact Resistance:100m max. Ω  
Insulation Resistance:1000M min./500VDC  
产品耐温度: 260° C \* C S & L 70° C S & L 70±5° C  
Mating Cycles:1500Min Insertions

B	ECN20200312002	修改2D与3D及实物不符处	Faji	2020.03.03
A	----	NEW	PURE	2020.02.21
REVISION NO.	ECR NO.	DESCRIPTION	MARK	DATE
1				
2				
3				

	东莞市摩凯电子有限公司				
	PRODUCT NAME : MICRO-SIM 卡座PUSH/PUSH 1.35H-6 PIN		DRAWING: Faji	DATE: 2020.03.03	
	PRODUCT NO. : MS135-T1250-11-W		CHECK: Alex	DATE: 2020.03.03	
	DRAWING NO. : D-MS135-T1250-11-W		APPROVED: Alex	DATE: 2020.03.03	
DIMENSIONS INIT: mm UNLESS OTHERWISE SPECIFIABLE		SCALE: 1:1	DWG ID: C D	REV.: B	PAGE: 1 of 1
DIMENSION TOLERANCE X.X: ± 0.38 X.XX: ± 0.20 X.XXX: ± 0.15 ANGULAR: ± 3'					