


\* 所有原料材质, 生产制程, 电镀必须符合H要求

NOTES:

1. MATERIAL: SEE "TABLE 1";
2. FINISH: SEE "TABLE 1";
3. ELECTRICAL:
  - 3.1. VOLTAGE RATING: 12 VAC RMS;
  - 3.2. CURRENT RATING: 0.5 AMP;
  - 3.3. CONTACT RESISTANCE: 50mΩ Max.(Initial),  
100mΩ Max.(After Life test);
  - 3.4. INSULATION RESISTANCE: 1000 MΩ Min., 500VDC.(Initial),  
100 MΩ Min., 500VDC.(After Humidity test);
  - 3.5. WITHSTAND VOLTAGE: 500 VAC RMS 50(60)Hz, 1 minute;
4. MECHANICAL:
  - 4.1. MATING FORCE: 3.0Kgf MAX.;
  - 4.2. UNMATING FORCE: 0.3Kgf MIN.;
  - 4.3. OPERATING LIFE: 5000 CYCLES MIN.;
5. ENVIRONMENTAL:
  - 5.1. OPERATION: -30°C~+80°C.

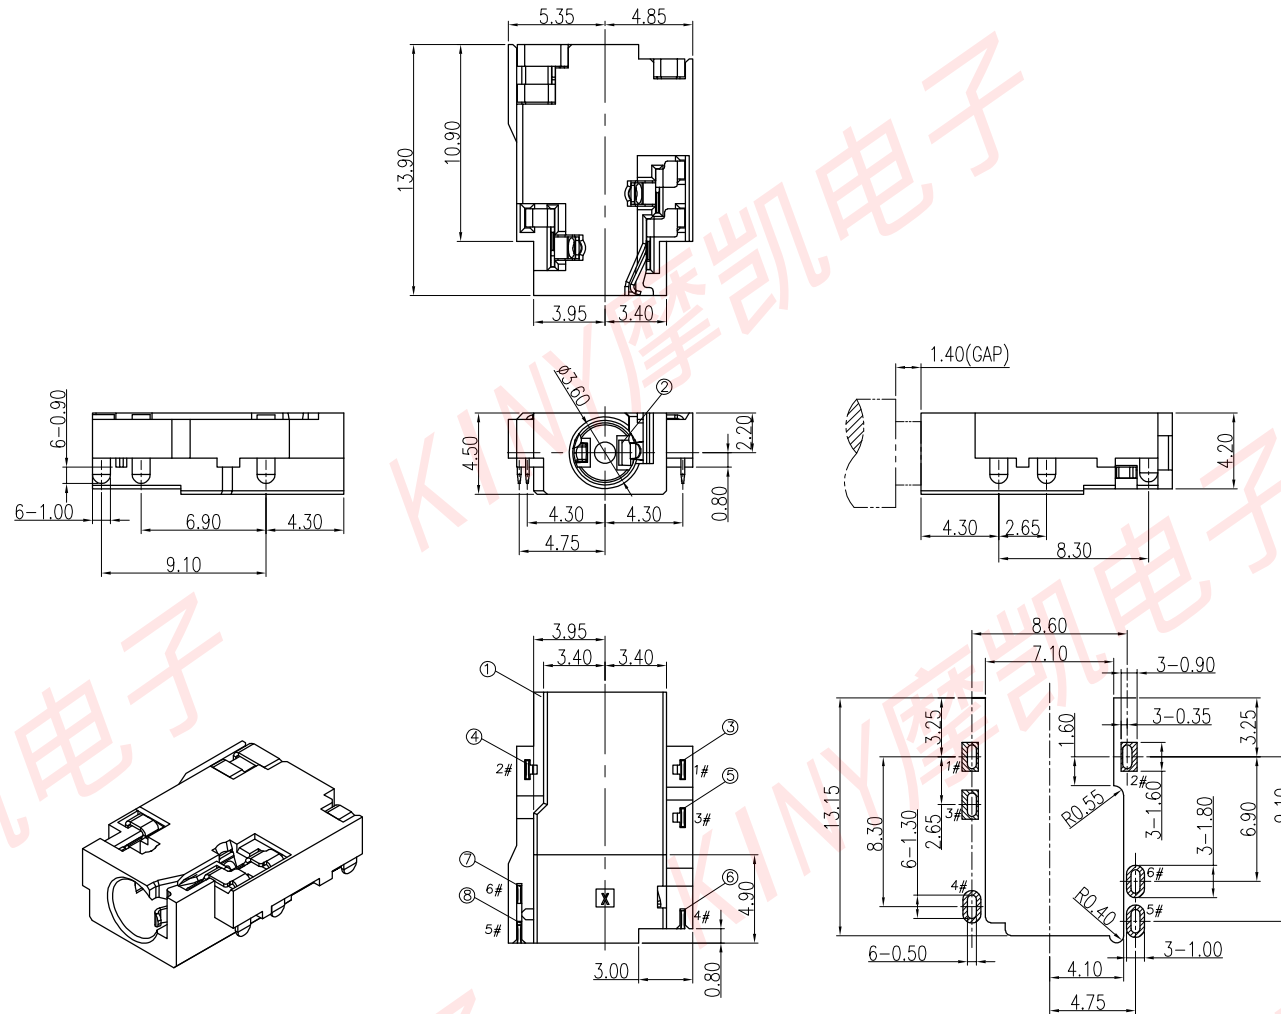

3D VIEW

PCB HOLES(TOP VIEW) t=1.0mm  
NOTE:GENERAL TOLERANCE:±0.05mm

PLUG SPEC		SCHEMATIC		AFTER INSERT SCHEMATIC	
⑧ Contact_5	⑤ 1	Copper Alloy			T=0.20mm
⑦ Contact_6	⑥ 1	Copper Alloy			T=0.20mm
⑥ Contact_4	④ 1	Copper Alloy			T=0.20mm
⑤ Contact_3	③ 1	Copper Alloy			T=0.20mm
④ Contact_2	② 1	Copper Alloy			T=0.20mm
③ Contact_1	① 1	Copper Alloy			T=0.20mm
② Separator	1	HIGH TEMP	BLACK,UL94V-0		
① Housing	1	HIGH TEMP	BLACK,UL94V-0		
NO.	PART NAME	QTY	MATERIAL	DESCRIPTION	REMARK

**KINY**

东莞市摩凯电子有限公司

DIMENSIONS INIT: mm  
UNLESS OTHERWISE SPECIFIABLE  
DIMENSION TOLERANCE  
X.X: ± 0.35  
X.XX: ± 0.20  
X.XXX: ± 0.10  
ANGULAR: ± 2'

PRODUCT NAME : PHONE JACK	DRAWING: Faji	DATE: 2020.08.25
PRODUCT NO. : PJK230-D1100-01	CHECK: Alex	DATE: 2020.08.25
DRAWING NO. : D-PJK230-D1100-01	APPROVED: Alex	DATE: 2020.08.25
SCALE: 1:1	DWG ID: C D	REV.: A
		PAGE: 1 OF 1

A	-----	NEW RELEASE	Faji	2020.08.25
REVISION NO.	ECR NO.	DESCRIPTION	MARK	DATE
1				
2				
3				