

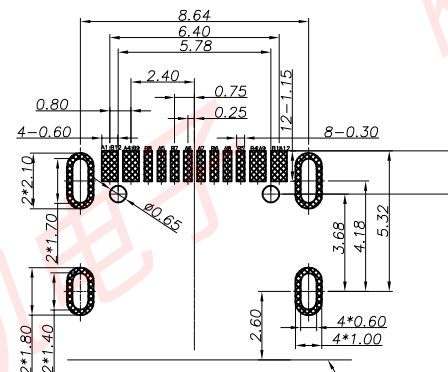

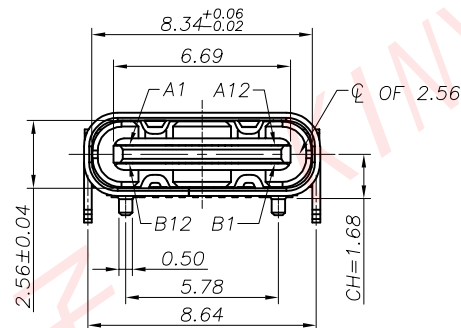
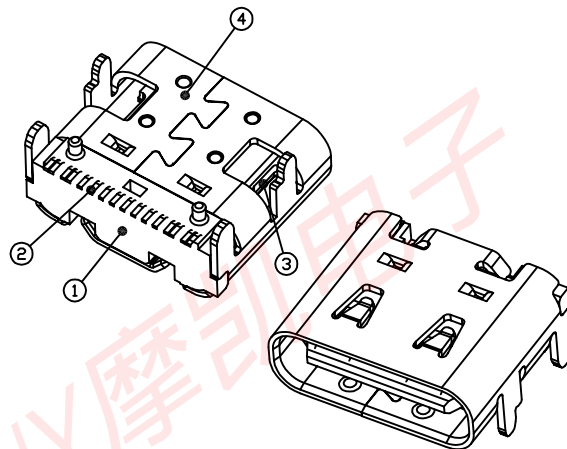



* 所有原材料, 生产制程, 电镀必须符合H要求

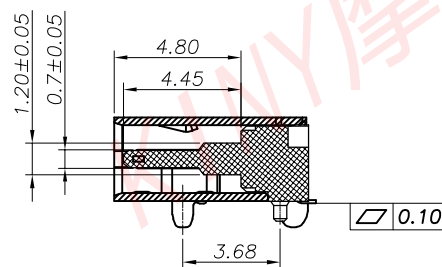

RECOMMENDED P.C.B. LAYOUT
TOLERANCE UNSPECIFIED ±0.05mm

A1	GND	B12	GND
A4	VBUS	B9	VBUS
A5	CC1	B8	SBU2
A6	DP1	B7	DN2
A7	DN1	B6	DP2
A8	SBU1	B5	CC2
A9	VBUS	B4	VBUS
A12	GND	B1	GND
PIN	SIGNAL NAME	PIN	SIGNAL NAME

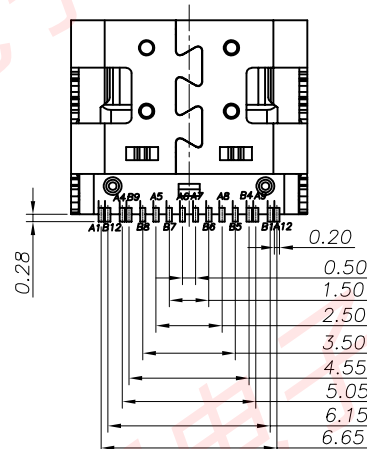

SECTION:A-A

6	SHELL	STAINLESS STEEL	Ni Plated	1PCS
5	SHIELDING PLATE	STAINLESS STEEL	---	1PCS
4	MD	HIGH TEMPERATURE PLASTIC	BLACK	1PCS
3	CONTACT	COPPER ALLOY	Au/Ni Plated	1SET
2	CONTACT	COPPER ALLOY	Au/Ni Plated	1SET
1	HOUSING	HIGH TEMPERATURE PLASTIC	BLACK	1PCS
NO.	DESCRIPTION	MATERIAL	REMARKS	QTY

KINY

东莞市摩凯电子有限公司

DIMENSIONS INIT: mm
UNLESS OTHERWISE SPECIFIABLE
DIMENSION TOLERANCE
X.X: ± 0.35
X.XX: ± 0.20
X.XXX: ± 0.10
ANGULAR: ± 2'

PRODUCT NAME :
USB C F 单排16P 有柱四脚插板
带弹片 CONN
PRODUCT NO. :
TPC16-F1150-03
DRAWING NO. :
D-TPC16-F1150-03

DRAWING: FAJI
CHECK: Alex
APPROVED: Alex
SCALE: 1:1
DWG ID: C D
REV.: A
DATE: 2021.06.24
DATE: 2021.06.24
DATE: 2021.06.24
PAGE: 1 OF 1

A	---	NEW RELEASE	FAJI	2021.06.24
REVISION NO.	ECR NO.	DESCRIPTION	MARK	DATE